

Pet Bicycle Trailer

Owner's Manual & Instructions



Please read through this manual and following the instructions before and during use.

Assembly:

1. Assembly of the wheels

The wheel assembly may only be carried out by a dealer assembling the trailer for the first time.


Axle with corrugated washer (1), plain washer (2) and stop nut (3). (Picture 1)

When assembling the axle in the wheel, slide the axle into the hollow axle underneath the frame until the holes of the axle and hollow axle are aligned. (Picture 2)

Insert the safety pin through the holes in the axle and hollow axle and engage it by turning the safety clip down. (Picture 3 and 4)

Insert the wheel on the axle. (Picture 5)

Put the corrugated washer (1) and plain washer (2) and tighten up the stop nut (3) fully using an adjustable wrench.(Picture 6)

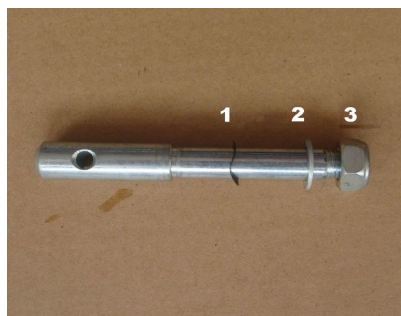

Picture 1



Picture 2



Picture 3



Picture 4



Picture 5



Picture 6

WARNING! The axle remains permanently assembled to the wheel. Never remove the axle from the wheel from now on as the stop nut (3) would not be re-usable.

2. Installing the Tow Bar

Lift the trailer up. Remove safety pin from back hole in two bar mount. Swivel the tow bar 180°. Lock the tow bar into place by re-inserting the safety pin.(Picture 7 and 8)

WARNING! The two bar safety pin must be locked into place before using the trailer. A tow bar that has not secured properly could loose during travel, resulting in serious injury or death.



Picture 7



Picture 8

3. Unfolding the Trailer

With the trailer frame lying flat, raise the side panels so that they are vertical. (Picture 9)

Position the roll bar into place until the holes in the side panels and the holes on the ends of roll bar are line up. (Picture 10)

Insert the knob from outside of the side panel and then into the thread on the end of the roll bar. Repeat for the other side and fully tighten both knobs. (Picture 10)



Picture 9



Picture 10

4. Attaching the Safety Flag

Insert the flag pole into the flag pocket on the left rear corner of the side panel. Always use the safety flag. It's an essential safety device, which can help make you more visible to motorists and other cyclists.



Hitching the Trailer on the Bicycle

NOTE: The universal hitch is only suitable for bicycle with full axle or/and with quick release axle.

1. Bicycles with Full Axle

Remove the left hand axle nut from the bicycle. Any spacers or washers can generally be retained. Put the hitch on the axle and re-attach the nut.

WARNING: The axle nut must be tightened on the axle thread by at least 5 full turns, so that adequate clamping force is ensured. A thread which is too short can result in accidental loosening of the rear wheel and therefore cause serious injury or death. If in doubt, contact your specialist dealer.

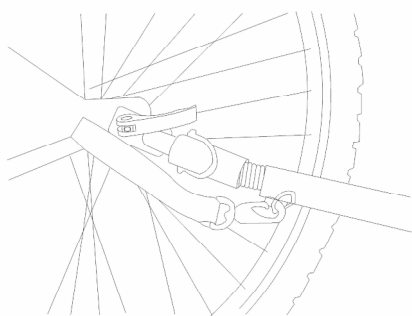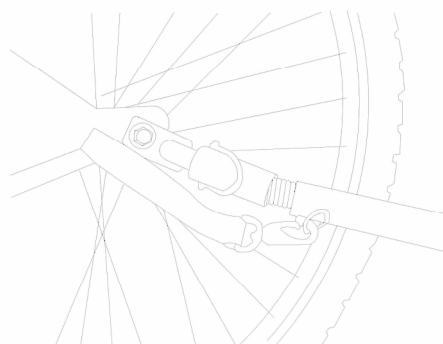

2. Bicycles with Quick Release Axle

Remove the quick release from the bike and guide it through the hitch along with the quick release axle. Push the quick release through the wheel hollow axle again, screw the nut and clamp the quick release with the correct pressure.

In order to ensure that the hub is clamped sufficiently in the hollow axle, the quick release lever must begin gripping as it moves from the open to the middle position, and approaching the closed position you should clearly feel resistance as you tighten. If it is too easy or too difficult to move the quick release lever, tighten or loosen the quick release nut on the other side of the hub.

WARNING: The thread of the quick release nut must be tightened on the quick release axle by at least 5 full turns, so that adequate clamping force is ensured. A quick release axle with is too short can result in accidental loosening of the rear wheel and therefore cause serous injury or death. If in doubt, contact your specialist dealer.

Insert the safety pin through holes in both hitch and hitch connectors. Rotate and lock up the pin.

Wrap the safety strap around the chain stay and fasten it to the tow bar D-ring with the snap hook.

WARNING! Hitch and safety strap must be properly installed. Inspect the hitch and tow bar frequently for any damage or loose fasteners. Damaged or improperly installed can result in serious injury or death.

Loading and Unloading pets

Load and unload pet only through the rear door, with the front door closed and the trailer attached to the bicycle. With the pet inside the trailer, snap one end of the safety leash (included) to the pet's collar and the other end to the D-ring located inside the trailer. Adjust the length of the leash so that the pet cannot exit through the front window when it is open. Always close the rear door while riding.

Safety Instructions:

- The trailer is intended to carry pet only. No human passengers!
- Maximum load: 40 kgs
- Always ride with the rear door closed. When riding, your pet should always be secured with the safety leash adjusted to the correct length.
- Maximum speed: 16km/hour.
- Always wear a helmet when riding.
- Carefully check the bolts, nuts and safety pins. Make sure that all these parts are properly tightened or locked.
- Be aware that riding with the trailer increases your braking distance and may affect your ability to control the bicycle. Thoroughly practise in a safe area until you become familiar with it.
- Only use factory-supplied wheels, with the tires inflated to 30-35 P.S.I. Check pressure before each use.
- Do not make any alterations to the trailer or hitch, which could result in injury or death.

Warranty:

The guarantee regulations will apply.

(Optional) Strolling Kit for Pet Bicycle Trailer

Owner's Manual & Instructions

This kit allows you to quickly convert your pet trailer to a pet stroller. Please read through this manual and following the instructions before and during use.

Assembly:

1. Make sure the tow bar is locked into place under the frame.
2. Attach the front wheel assembly: Slide the short square tube on the front wheel over the matching tube at the lower front edge of the trailer cabin. Align the holes in each tube, install the “quick release” pin and tighten fully.
3. Attach the handlebar: Attach the two handlebar mounting tubes to the frame on the rear panel. With the open end of the mounting tube facing up, align the holes on the tube to the holes on the frame. Insert screws through the tube and holes in the frame and attach 10mm nuts from the inside of the cabin. Tighten firmly using a screwdriver and wrench. Slide the ends of the handlebars into the mounting tubes, align the holes and insert the safety pins and lock it.



Safety Instructions:

- The trailer/stroller is intended to carry pets only. No human passengers!
- Always stroll or jog with the rear door closed. When riding, your pet should always be secured with the safety leash adjusted to the correct length.
- Do not exceed the recommended weight capacity.
- Check tire inflation before each use.